


# CP30 COLD PLANERS



**AVAILABLE FOR: SSV65 / SSV75 / SVL65-2 / SVL75-3 / SVL97-2**

- Independent RH/LH skid shoe control
- Hydraulic tilt, depth, and sideshift integrated into multi-function grips of the SSV/SVL
- Optional water system
- Removable cutting teeth
- 3 Line set up (pressure, return, and case drain)

Road contractors, municipalities, and rental yards will find this tool ideal for milling asphalt, cutting utility trenches, and pothole/shoulder repairs.

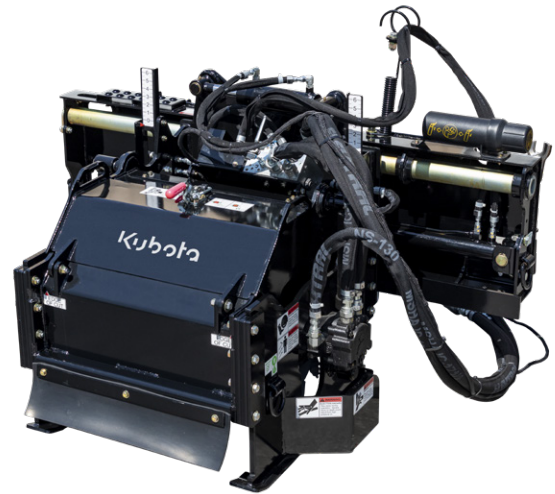

The CP30 Series features a 6" cutting depth, 5/18" drum wall and 2-1/2" tooth standoff for efficient milling.

	CP3012LF	CP3016LF	CP3018	CP3024	CP3030	CP3040	CP3048
<b>Cutting Width (cm)</b>	12" (31)	16" (41)	18" (41)	24" (61)	30" (76)	40" (102)	48" (122)
<b>Cutting Depth (cm)</b>	0 - 5 (0 - 13)			0 - 6 (0 - 15)			
<b>Weight (kg)</b>	1190 lbs (540)	1360 lbs (617)	1635 lbs (741)	1805 lbs (819)	1895 lbs (860)	2215 lbs (1005)	2410 lbs (1093)
<b>Number of Picks</b>	30	38	40	50	60	76	90
<b>Min. Hydraulic Flow (Lpm)</b>	15 gpm (56.8)		24 gpm (91)	27 gpm (102)	30 gpm (114)		
<b>Max. Hydraulic Flow (Lpm)</b>	25 gpm (94.6)			42 gpm (159)			
<b>Min. Pressure (MPa)</b>	2,000 psi (1.38)		2,500 psi (1.72)	2,500 psi (1.72)	3,000 psi (2.07)	3,500 psi (2.41)	
<b>Max. Pressure (MPa)</b>	3,500 psi (24)			5,000 psi (34)			
<b>Tilt Capability</b>	+/- 15°		+/- 15°	+/- 13°	+/- 10°	+/- 8°	+/- 6°
<b>Sideshift Travel (cm)</b>				26" (66)			
<b>Wall Clearance (cm)</b>	N/A			4" (10 cm)			