

PS20 PRIMARY SEEDERS




new

AVAILABLE FOR: SSV65 / SSV75 / SVL65-2 / SVL75-2 / SVL95-2s

- Patent pending bi-directional seed cups
- Universal Quick-Attach Hitch and 3-point hitch standard
- Large capacity seed box
- Floating packer wheels to follow the contours

Ideal tool for landscapers and contractors. The patent pending bi-directional seed cups allow the seeder to travel forwards or backwards. The dual skid hitch and 3-point hitch make this a great tool for rental yards.

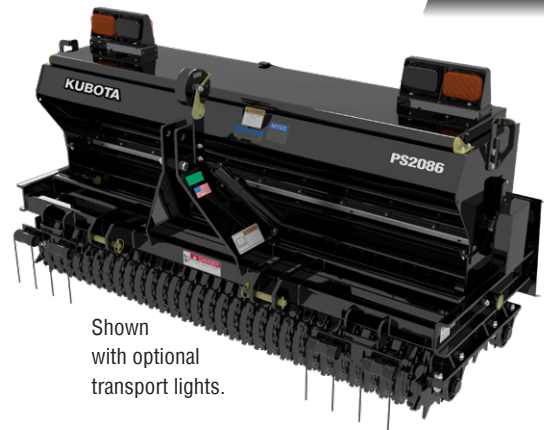

Shown with optional transport lights.



Large seedbox capacity keeps filling to a minimum and increases productivity.



Floating packer wheels follow the contours and allows the unit to stay in contact with the ground for consistent seed-to-soil contact.

	PS2072	PS2086
Tractor Horsepower* (kw)	25-60 (18.6-44.7) Not meant for small tractor such as Kubota BX	
Seeding Width (m) Broadcast	72" (1.83)	86" (2.18)
Overall Width (m)	81" (2.06)	95" (2.41)
Overall Height (cm)	42" (1.07)	
Overall Length (cm)	35" (88.9)	
Empty Weight (kg)	1,464 lbs (664.1)	1,677 lbs (760.7)
Seedbox Capacity (L/m)	1 Bushel/foot (35.2/39)	
3-Point Tractor Hitch	Cat. 1, Quick-Hitch adaptable	
Seed Cups Patent Pending	Bi-directional fluted cups for accurate metering	
	10	12
Packer Rollers (cm)	9" (22.9) Notched cast iron bed forming packer rollers	
	31 Front, 30 Rear	37 Front, 36 Rear

AP-PS2086

Specifications & Capacities	
Model Nos.	AP-PS2086
Skid Steer Horsepower	35-95 hp (26.1-70.8 kW)
Tractor Horsepower*	40-70 hp (29.8-52.2 kW)
Seeding Width (Broadcast)	86" (2.18 m)
Overall Width	95" (2.41 m)
Overall Height	42" (1.07 m)
Overall Length	35" (88.9 cm)
Empty Weight	1677 lbs (760.7 kg)
Seedbox Capacity	7.2 Bushels (253.7 L)
3-Point Tractor Hitch	Category 1; Quick Hitch Adaptable
Main Seedbox Construction	Continuous welded for water tight construction
Lid construction	Heavy duty precision fit with seed splash guard
Ground Drive Metering	Driven from right side of rear roller with #40 Roller chain
Seed Cup Drive	Chain driven from right side of rear roller
Seed Cup Agitation	Chain driven star type agitators above seed cups
Seed Cups (Patent Pending) Bi-directional Fluted Cups for Accurate metering	12
Seed Settings	Wide range of calibration
Seed Drop	Wind guarded
Track Removers	Double torsion spring height adjustable and replaceable two each
9" (22.9 cm) Notched Cast Iron Bed Forming Packer Rollers. (Front)	37
9" (22.9 cm) Notched Cast Iron Bed Forming Packer Rollers. (Rear)	36
Roller Spindles	1 3/4" with greasable bearings

*The Primary Seeder is not meant for a Kubota BX tractor or comparable frame tractors.

